



# VERTICAL BLENDERS

## Time Tested Technology



A TA-Blender attached directly to a Weigh Hopper Conveyor

### Durability

TA Series Blenders are built with high quality 12 gauge 304 stainless steel in the drums and hoppers. Frames and augers are made from heavy duty mild steel. Combine those quality materials with top notch engineering, and you have the best vertical blender in the business for over 20 years.

### Versatility

TA Blenders are equipped with a Salem Valve at discharge and can be mated to a 24" or 30" blender discharge conveyor for floor blending, or used as part of a larger blending system. TA Blenders can also include a built in material conditioner within the feed hopper. Conditioners can be retrofit into existing models, as well.

### Exceptional Blend Quality

TA Series Blenders have a tapered blending auger that quickly-yet gently-draws material from the payload hopper into the blending drum. Once inside, material is constantly blending as it moves up the center and down the sides. A complete blend cycle takes only minutes.

### Fast and Easy


We built in a 56° slope and wide in-feed throat to make the inlet hopper fast. The 4 ton per minute discharge rate through our large Salem Valves will ensure your customers wait in line less.

### NTEP Approved Scale System

Each blender's scale system is certified Legal For Trade by the National Type Evaluation Program. The blender is weighed by load cells and the batch weight is displayed digitally. There is no need to scale out once you've loaded.




Featuring manual or air operated discharge valves



Equipped with large access panels or easy cleaning




Fitted with NTEP certified load cells



# TA-Series Blenders

## Heavy Duty, Engineered for Fertilizer

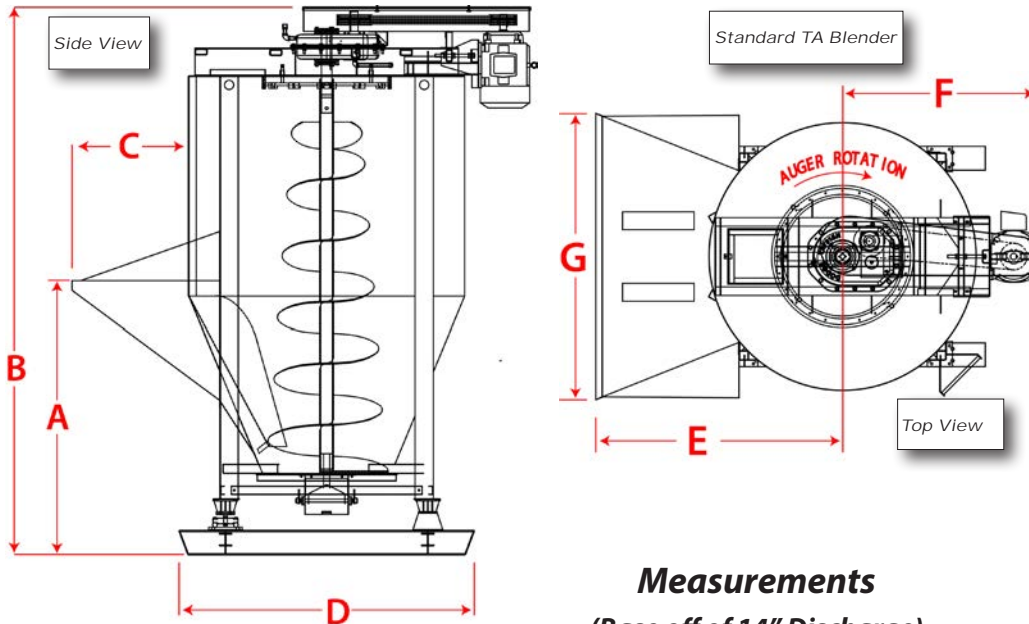

**Measurements**  
(Base off of 14" Discharge)

	TA-6000	TA-8000	TA-10000	TA-12000	TA-14000	TA-16000	TA-18000
A	7' 5"	7' 5"	7' 5"	7' 6"	7' 8"	7' 8"	7' 8"
B	11' 10"	13' 5"	14' 10"	17' 4"	16' 7"	17' 10"	19' 5"
C	3' 2"	3' 2"	3' 2"	3' 2"	3' 0"	3' 0"	3' 0"
D	8'	8'	8'	8'	9' 10"	9' 10"	9' 10"
E	6' 11"	6' 11"	6' 11"	6' 11"	7' 3 5/8"	7' 3 5/8"	7' 3 5/8"
F	5' 7"	5' 7"	5' 9"	5' 11"	6' 10"	6' 11"	7' 0"
G	8'	8'	8'	8'	8' 9"	8' 9"	8' 9"

### Specifications

Auger.....TA-6000 through TA-12000 40" bottom tapering to a 22" top  
 Auger.....TA-14000 through TA-18000 44" bottom tapering to a 22" top  
 Motor.....Totally Enclosed Fan Cooled  
 Reducer..... Dodge TA Reducer  
 Discharge..... 14" or 16" manually or air operated  
 Discharge rate.....4 tons per minute  
 Impregnation.....Stainless Steel 3/4" spray bar. Optional 2nd spray bar.

	TA-6000	TA-8000	TA-10000	TA-12000	TA-14000	TA-16000	TA-18000
Horsepower	30 HP	40 HP	50 HP	75 HP	100 HP	125 HP	125 HP
Capacity	6 ton	8 ton	10 ton	12 ton	14 ton	16 ton	18 ton

## Sackett-Waconia

1701 S. Highland Ave • Baltimore, MD 21224 • (410) 276-4466  
 680 Tacoma Blvd • Norwood Young America, MN 55368 • (952) 442-4450

www.sackettwaconia.com



12-12-2017